



480~505M

AS480-505BM10-132 FULL BLACK


MORE POWER


UP TO 21.27% Maximize the light absorption area, module efficiency up to 21.27 %.


 Low temperature coefficient (Pmax): -0.35 % /°C.


 Better shading tolerance.


MORE RELIABLE


 Lower internal current, lower hot spot temperature.


 Cell crack risk limited in small region, enhance the module reliability.

 Heavy snow load up to 5400 Pa, wind load up to 2400 Pa.

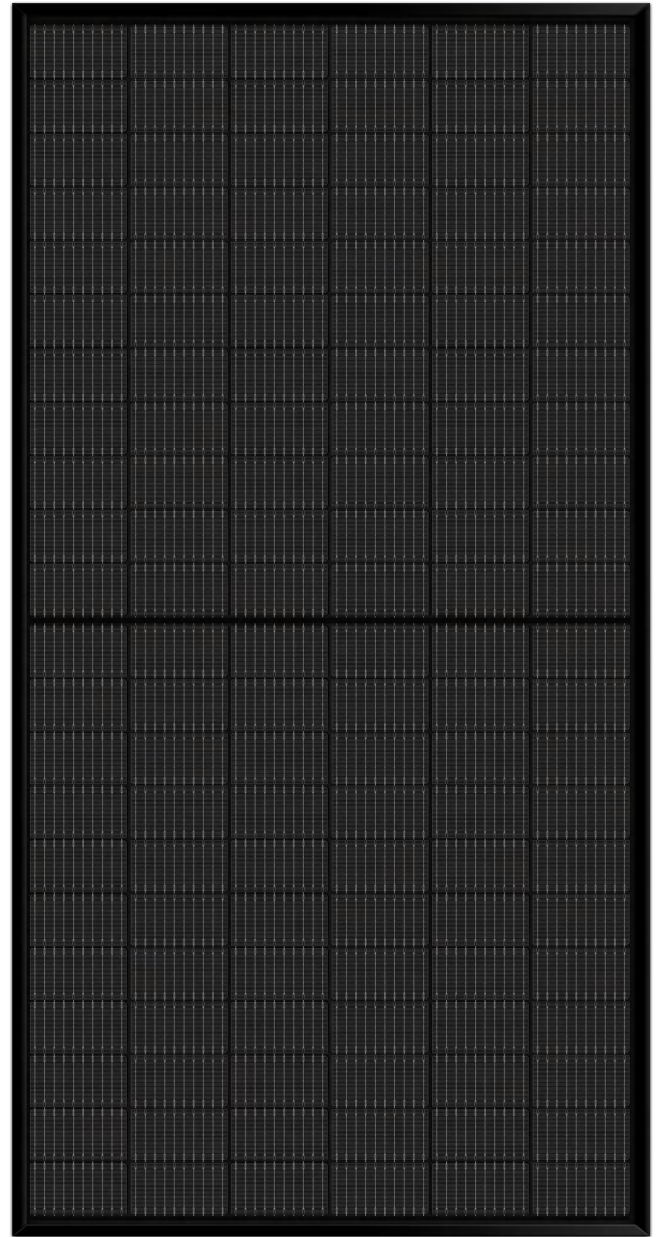

 **12** 12-year Product Warranty

 **25** 25-year Linear Performance Warranty

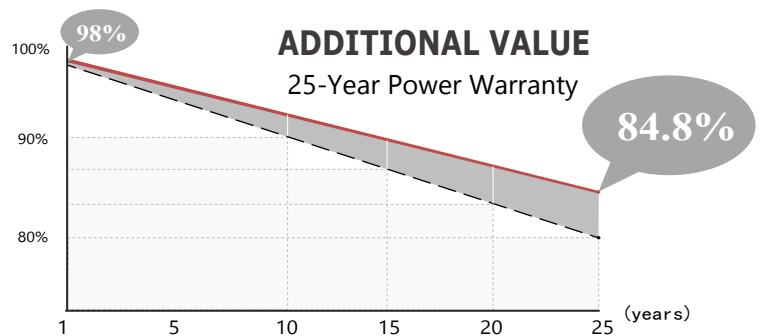

AS480-505BM10-132

480-505W

Half-Cell High Efficiency PV Module

Weight

26.0kgs±3%

Cells Type


Mono 182x91mm

Dimension(LxWxT)

2094±2mmx1134±2mmx35±1mm

Packaging

31pcs/pallet, 682pcs/40HQ container

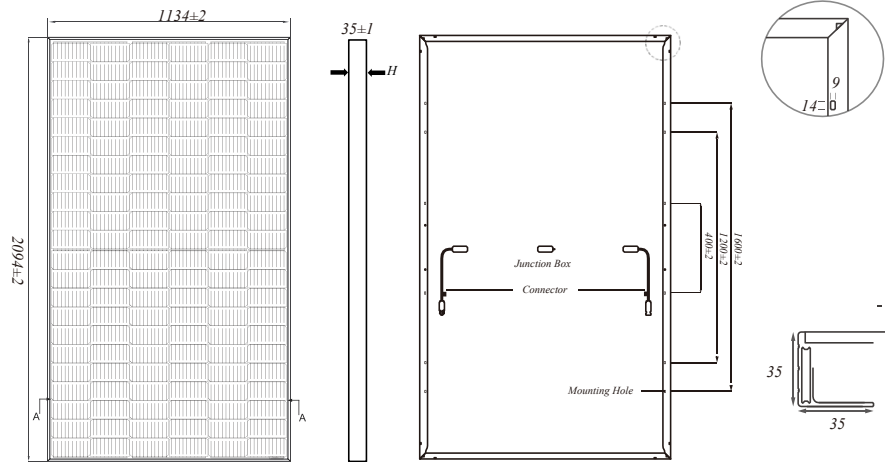

Front

Side

Back

Remark: customized frame color and cable length available upon request

MECHANICAL SPECIFICATION

Cell	Mono
No.of cells	132(6x22)
Cable Length	300mm(+)/300mm(-)
Cable Cross Section Size	4mm ² (IEC)
Junction Box	IP68,3 diodes
Connector	MC4 Compatible

OPERATING PARAMETERS

Maximum System Voltage	1500VDC
Operating Temperature	-40°C ~ +85°C
Maximum Series Fuse	25A
Maximum StaticLoad,Front	5400Pa(112lb/ft ²)
Maximum StaticLoad,Back	2400Pa(50lb/ft ²)
Safety Class	ClassII

ELECTRICAL CHARACTERISTICS STC:AM1.5 1000W/m² 25 °C NOCT:AM1.5 800W/m² 20 °C 1m/s Test uncertainty for Pmax ±3%

Module Type	AS480BM10-132		AS485BM10-132		AS490BM10-132		AS495BM10-132		AS500BM10-132		AS505BM10-132	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power(Pmax/W)	480	361.6	485	365.4	490	369.1	495	372.9	500	376.7	505	380.4
Open Circuit Voltage(Voc/V)	45.07	42.17	45.22	42.31	45.37	42.45	45.52	42.56	45.67	42.73	45.82	42.87
Short Circuit Current(Isc/A)	13.65	11.02	13.72	11.07	13.79	11.13	13.86	11.19	13.93	11.24	14.00	11.30
Voltage at Maximum Power(Vmp/V)	37.65	34.62	37.81	34.80	37.97	34.98	38.13	35.16	38.29	35.34	38.45	35.51
Current at Maximum Power(Imp/A)	12.75	10.44	12.83	10.50	12.90	10.55	12.98	10.60	13.06	10.66	13.13	10.71
Module Efficiency(%)	20.21		20.42		20.64		20.85		21.06		21.27	

TEMPERATURE RATINGS

Norminal Operating Cell Temperature(NOCT)	45±2 °C
Temperature Coefficient of Isc	+0.045%/ °C
Temperature Coefficient of Voc	-0.275%/ °C
Temperature Coefficient of Pmax	-0.350%/ °C

I-V CURVE(AS480-505BM10-132)

