



480~505W

AS480-505M10-132


MORE POWER


UP TO 21.27% Maximize the light absorption area, module efficiency up to 21.27 %.

 Low temperature coefficient (Pmax): -0.35 % /°C.


 Better shading tolerance.

MORE RELIABLE

 Lower internal current, lower hot spot temperature.


 Cell crack risk limited in small region, enhance the module reliability.

******* Heavy snow load up to 5400 Pa, wind load up to 2400 Pa.

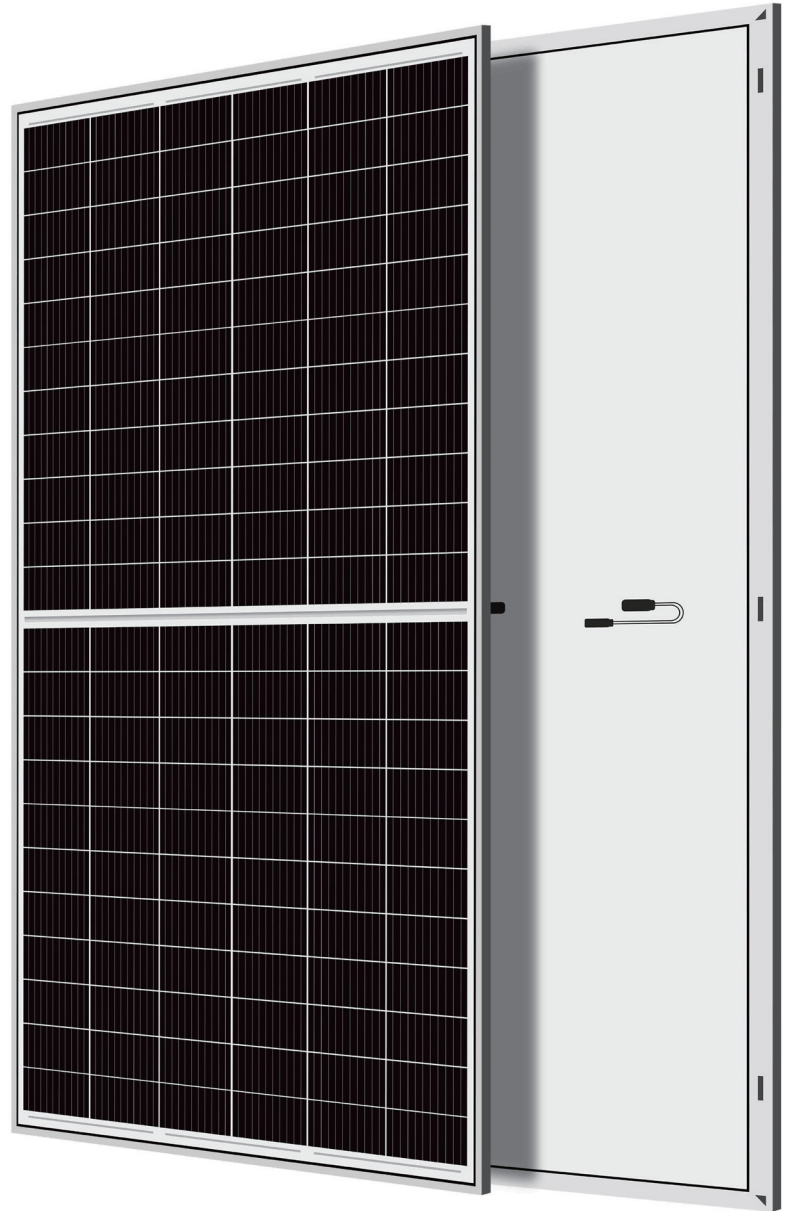

12 12-year Product Warranty

25 25-year Linear Performance Warranty

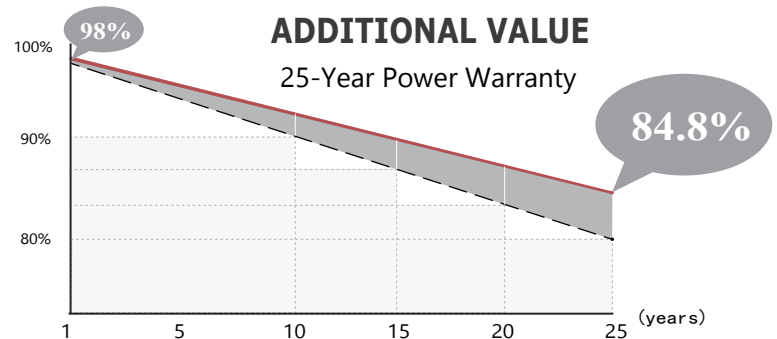

AS480-505M10-132

480-505W

Half-Cell High Efficiency PV Module

Weight

24.4kgs±3%

Cells Type


Mono 182x91mm

Dimension(LxWxT)

2094±2mmx1134±2mmx30±1mm

Packaging

36pcs/pallet, 792pcs/40HQ container

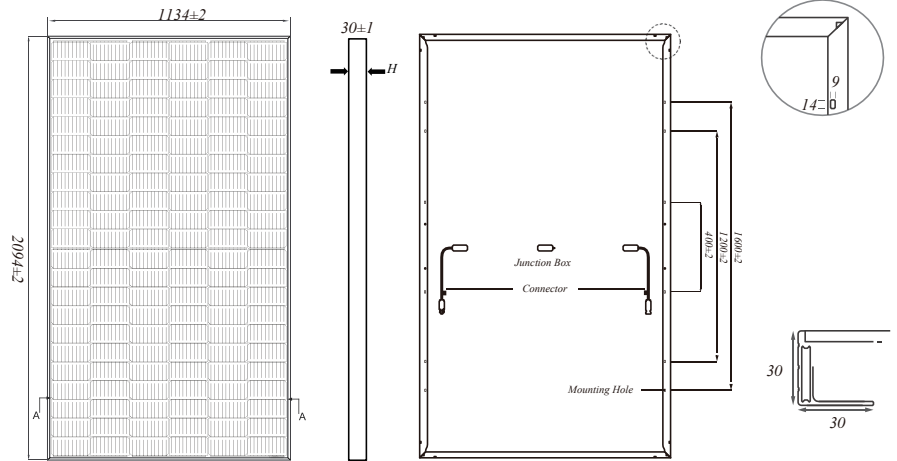

Front Side Back
Remark: customized frame color and cable length available upon request

MECHANICAL SPECIFICATION

Cell	Mono
No.of cells	132(6x22)
Cable Length	300mm(+)/300mm(-)
Cable Cross Section Size	4mm ² (IEC)
Junction Box	IP68,3 diodes
Connector	MC4 Compatible

OPERATING PARAMETERS

Maximum System Voltage	1500VDC
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	25A
Maximum StaticLoad,Front	5400Pa(112lb/ft ²)
Maximum StaticLoad,Back	2400Pa(50lb/ft ²)
Safety Class	Class II

ELECTRICAL CHARACTERISTICS STC:AM1.5 1000W/m² 25 °C NOCT:AM1.5 800W/m² 20 °C 1m/s Test uncertainty for Pmax ±3%

Module Type	AS480M10-132		AS485M10-132		AS490M10-132		AS495M10-132		AS500M10-132		AS505M10-132	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power(Pmax/W)	480	361.6	485	365.4	490	369.1	495	372.9	500	376.7	505	380.4
Open Circuit Voltage(Voc/V)	45.07	42.17	45.22	42.31	45.37	42.45	45.52	42.56	45.67	42.73	45.82	42.87
Short Circuit Current(Isc/A)	13.65	11.02	13.72	11.07	13.79	11.13	13.86	11.19	13.93	11.24	14.00	11.30
Voltage at Maximum Power(Vmp/V)	37.65	34.62	37.81	34.80	37.97	34.98	38.13	35.16	38.29	35.34	38.45	35.51
Current at Maximum Power(Imp/A)	12.75	10.44	12.83	10.50	12.90	10.55	12.98	10.60	13.06	10.66	13.13	10.71
Module Efficiency(%)	20.21		20.42		20.64		20.85		21.06		21.27	

TEMPERATURE RATINGS

Norminal Operating Cell Temperature(NOCT)	45±2 °C
Temperature Coefficient of Isc	+0.045%/°C
Temperature Coefficient of Voc	-0.275%/°C
Temperature Coefficient of Pmax	-0.350%/°C

I-V CURVE(AS480-505M10-132)

