



# 525~550W

AS525-550M10-144 FULL BLACK


## MORE POWER


**UP TO 21.28%** Maximize the light absorption area, module efficiency up to 21.28%.


 Low temperature coefficient (Pmax): -0.35 % /°C.

 Better shading tolerance.


## MORE RELIABLE


 Lower internal current, lower hot spot temperature.

 Cell crack risk limited in small region, enhance the module reliability.

 Heavy snow load up to 5400 Pa, wind load up to 2400 Pa.

 **12** 12-year Product Warranty

 **25** 25-year Linear Performance Warranty

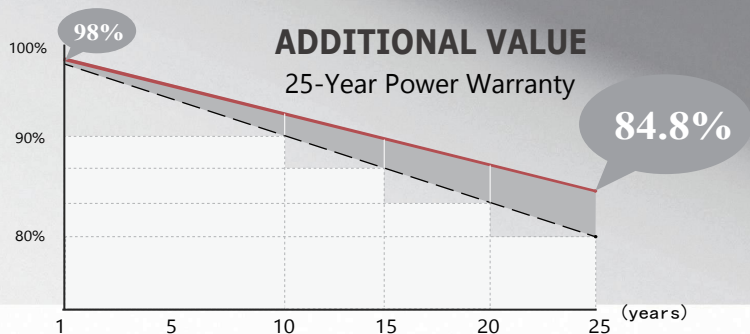

AS525-550M10-144

# 525-550W

Half-Cell High Efficiency PV Module

**Weight**

**28.6kgs±3%**

**Cells Type**


**Mono 182x91mm**

**Dimension(LxWxT)**

**2279±2mmx1134±2mmx35±1mm**

**Packaging**

**31pcs/pallet, 620pcs/40HQ container**

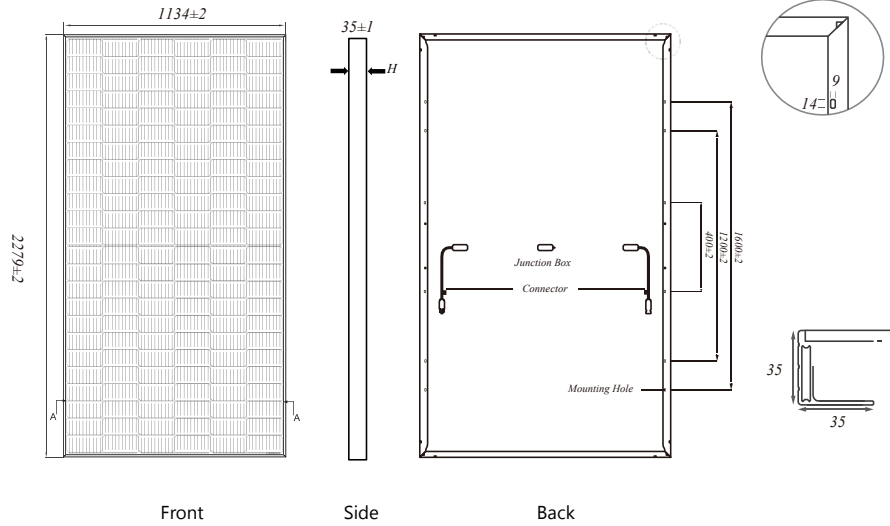

Remark: customized frame color and cable length available upon request

**MECHANICAL SPECIFICATION**

Cell	Mono
No.of cells	144(6x24)
Cable Length	300mm(+)/300mm(-)
Cable Cross Section Size	4mm <sup>2</sup> (IEC)
Junction Box	IP68,3 diodes
Connector	MC4 Compatible

**OPERATING PARAMETERS**

Maximum System Voltage	1500VDC
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	25A
Maximum StaticLoad,Front	5400Pa(112lb/ft <sup>2</sup> )
Maximum StaticLoad,Back	2400Pa(50lb/ft <sup>2</sup> )
Safety Class	Class II

**ELECTRICAL CHARACTERISTICS** STC:AM1.5 1000W/m<sup>2</sup> 25°C NOCT:AM1.5 800W/m<sup>2</sup> 20°C 1m/s Test uncertainty for Pmax ±3%

Module Type	AS525M10-144		AS530M10-144		AS535M10-144		AS540M10-144		AS545M10-144		AS550M10-144	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power(Pmax/W)	525	395.5	530	399.2	535	403.0	540	406.8	545	410.5	550	414.8
Open Circuit Voltage(Voc/V)	4915	45.98	49.30	46.12	49.45	46.26	49.60	46.40	49.75	46.54	49.90	46.68
Short Circuit Current(Isc/A)	13.65	11.02	13.72	11.07	13.79	11.13	13.86	11.19	13.93	11.24	14.00	11.30
Voltage at Maximum Power(Vmp/V)	41.15	37.87	41.31	38.03	41.47	38.20	41.64	38.36	41.80	38.52	41.96	38.68
Current at Maximum Power(Imp/A)	12.76	10.44	12.83	10.50	12.90	10.55	12.97	10.60	13.04	10.66	13.11	10.71
Module Efficiency(%)	20.31		20.51		20.70		20.89		21.09		21.28	

**TEMPERATURE RATINGS**

Norminal Operating Cell Temperature(NOCT)	45±2 C
Temperature Coefficient of Isc	+0.045%/C
Temperature Coefficient of Voc	-0.275%/C
Temperature Coefficient of Pmax	-0.350%/C

**I-V CURVE(AS525-550M10-144)**

