


565~580W

AS565-580M10-144

12-Year Warranty for Materials and Processing

30-Year Warranty for Extra Linear Power Output

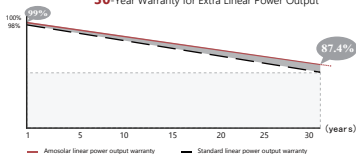

N-TYPE TOPCON module could increase power generation by 3%+ per watt compared with PERC



LOWER DEGRADATION RATE

First-year $\leq 1\%$, 2-30 year $\leq 0.4\%$



COMPATIBLE with mainstream trackers effective product for utility power plant



BETTER shading tolerance
Excellent performance under dim light



LOWER Temp. COEFFICIENT
More power generation under high-temperature

565-580W

Half-Cell High Efficiency PV Module

Weight

28.6kgs±3%

Cells Type


Mono 182x91mm

Dimension(LxWxT)

2278±2mmx1134±2mmx35±1mm

Packaging

31pcs/pallet, 620pcs/40HQ container

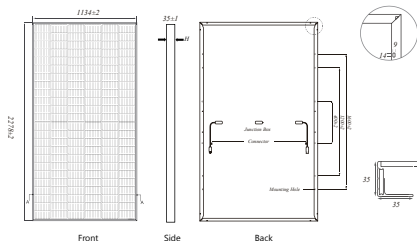

Remark: customized frame color and cable length available upon request

MECHANICAL SPECIFICATION

Cell	Mono
No.of cells	144(6x24)
Cable Length	300mm(+)/300mm(-)
Cable Cross Section Size	4mm ² (IEC)
Junction Box	IP68,3 diodes
Connector	MC4 Compatible

OPERATING PARAMETERS

Maximum System Voltage	1500VDC
Operating Temperature	-40 C ~ +85 C
Maximum Series Fuse	25A
Maximum StaticLoad,Front	5400Pa(112lb/ft ²)
Maximum StaticLoad,Back	2400Pa(50lb/ft ²)
Safety Class	Class II

ELECTRICAL CHARACTERISTICS

STC:AM1.5 1000W/m² 25°C NOCT:AM1.5 800W/m² 20°C 1m/s Test uncertainty for Pmax ±3%


Module Type	AS565M10-144		AS570M10-144		AS575M10-144		AS580M10-144	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power(Pmax/W)	565	425	570	429	575	433	580	437
Open Circuit Voltage(Voc/V)	50.60	48.06	50.74	48.20	50.88	48.34	51.02	48.48
Short Circuit Current(Isc/A)	14.23	11.49	14.31	11.55	14.39	11.61	14.47	11.67
Voltage at Maximum Power(Vmp/V)	41.92	39.38	42.01	39.51	42.22	39.64	42.37	39.77
Current at Maximum Power(Imp/A)	13.48	10.79	13.55	10.85	13.62	10.91	13.69	10.97
Module Efficiency(%)	21.87		22.07		22.26		22.45	

TEMPERATURE RATINGS

Normal Operating Cell Temperature(NOCT)	45±2 C
Temperature Coefficient of Isc	+0.046%/C
Temperature Coefficient of Voc	-0.25%/C
Temperature Coefficient of Pmax	-0.30%/C

*Spices are subject to change without further notification

I-V CURVE(AS565-580M10-144)



Amosolar Co.,Ltd

Add: Flat#RM 803 Chevalier House 45-51 Chatham Road South Tsim Sha Tsui, KL, HK
 Sales Center: No.210, Qianshan Road, Shushan District, Hefei, Anhui, China
 Web: www.amosolar.com/ amosolar.en.alibaba.com Email: info@amosolar.com

